

FAST 320 / FAST 320YF

SCF320R



SCF320H



CHARACTERISTICS



AUTOMATIC WORKING CYCLE
No Manual taps



FULL RECOVERY FUNCTIONS

AUTOMATIC OIL AND DYE INJECTION
with 1 dedicated scale

HERMETIC OIL AND DYE BOTTLES (Option)

HEATER BELT MOUNTED

PRINTER

USB PORT

INTERNAL DATA BASE

INCLUDED ANTIDUST BLANKET

STATUS INDICATORS



READY TO CARRY OUT SEMIAUTOMATIC
NITROGEN LEAK CHECK (Option)



READY TO USE ON HYBRID OR ELECTRIC CARS
with rapid oil decontamination system



INCLUDED BLUETOOTH CONNECTION
for SmartPhone/Tablet/PC



INTERNAL FLUSHING



A/C SYSTEM PROFESSIONAL FLUSHING AND
EASY FLUSH FUNCTION (Option)





A/C SYSTEM DIAGNOSYS

INTERNAL 1234YF REFRIGERANT IDENTIFIER (Option)

ACCESSORIES

	CODE	DESCRIPTION
	ACC-88.072	Gas bottle fitting 1/4
	ACC-88.011	Straight adapter HP 1/4
	ACC-88-289H	Universal bottle Adapter 1234YF
	STARTPACK-HERMETIC	Hermetic Bottle 6 x Dye, 6 x Oil PAG 46, 6 x Oil POE
	GAS ID GAS ID OPZ	SAE J 2843 Internal 1234yf refrigerant identifier kit
	Additional Accessories:	
	CFU-NITRO, CFU-NITRO.HD, ACC-FLUSHING, ACC-FLUSHING.YF, ACC-EASYFLUSH	

RANGE	R134a	R1234yf
		
MODEL	FAST 320	FAST 320YF
TECHNICAL FEATURES		
Process	Fully Automatic	Fully Automatic
Display	Graphic LCD 264x64 Pixel	Graphic LCD 264x64 Pixel
Full Recovery Function	YES	YES
Tank Capacity	18 Kg	12 Kg
Heater Belt	YES	YES
Scale Accuracy	+/- 5 g	+/- 5 g
Automatic Oil Injection	YES 1 Scale	YES 1 Scale
Automatic Dye Injection	YES 1 Scale	YES 1 Scale
Printer	YES	YES
Compressor	10 cc	10 cc
Vacuum Pump	100 l/min	100 L/min
Air Purge	Automatic	Automatic
Hermetic Oil and Dye bottles	Option	Option
Stauts Indicators	YES	YES
Data Base	YES	YES
Graphic data base	YES	YES
A/C Diagnostic / AC Pressure Test	YES	YES
Hybrid Function	YES Rapid oil decontamination	YES Rapid oil decontamination
Nitrogen Leak Check	Option/Semiautomatic	Option/Semiautomatic
Refrigerant 1234yf Identifier	NO	Option
PC data transfer	YES	YES
A/C Flushing Kit	Option	Option
Bluetooth Connection	YES	YES
Remote Control / Interface	YES via Bluetooth	YES via Bluetooth
Charging Gear Pump	NO	NO
12 V Power Supply	NO	NO
Power Supply	220V 50 Hz	220V 50 Hz
Dimensions	58x55x120 cm	58x55x120 cm
Weight	60/70 Kg	60/70 Kg
SCOPE OF DELIVERY		
Hp LP Quick Couplers	Included	Included
Hoses	3m	3m
Blanket	YES	YES
Power Cord	YES	YES
Calibration Handle	YES	YES
Extra oil bottle	YES	YES
2 x temperature probes	Included	Included

NITROGEN LEAK CHECK

CFU-NITRO

Kit for connection of 1l bottle to A/C Station - Inclusive of:


- Box
- Pressure Reducer for 1l bottle
- 30cm hose with tap
- Manifold for connection A/C station
- Tank Holder



CFU-NITRO.HD

Kit for connection of 200 bar bottle to A/C Station - Inclusive of:

- Box
- Pressure Reducer for 200 bar bottle
- 1,5m Hose
- Manifold for connection A/C station
 - IT (Italy)
 - DE (Germany, Poland)
 - FR (France, Spain, Portugal)
 - GB (United Kingdom)

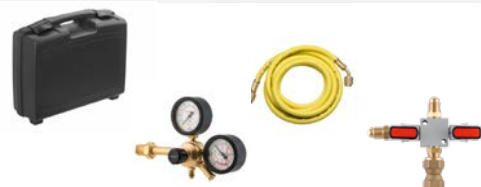


FLUSHING

ACC-FLUSHING

Professional Refrigerant R134a Flushing Kit

ACC-FUSHING.YF

Professional Refrigerant 1234yf Flushing Kit

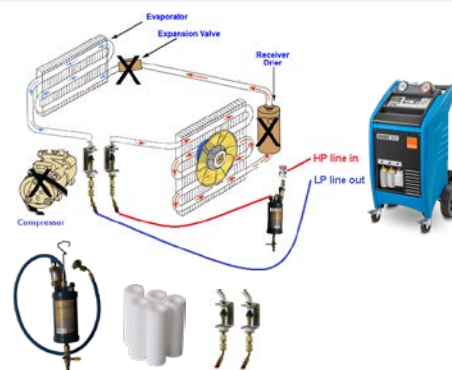

ACC-EASYFLUSH

A/C Flushing and Oil Cleaning



TOTAL DESIGN FOR
BEST PERFORMANCE

Oksys srl
Via dell'Albereto, 33D
50041 Calenzano (FI)
ITALY
Tel. +39 055 8990665
Fax +39 055 8947382
info@oksys.com

www.oksys.com